

LSI GREENLEE® LED SPEC GRADE BOLLARD (XHYP3)



US & Int'l. patents pending

SMARTTEC™ ENERGY SAVING FEATURES:

DRIVER - State-of-the-art driver technology designed specifically for LSI LED light sources provides unsurpassed system efficiency, control, and protection. Components are fully encased in potting material for IP68 moisture resistance. Driver complies with IEC and FCC standards.

OPTIONAL INTERNAL MOTION SENSOR - Doppler motion sensor activates switching of luminaire light levels. High level light is activated when passerby enters target zone and increased to full bright in 2-3 seconds. Low light level (30% of maximum drive current) is activated when target zone is absent of motion activity for 4 minutes and is gradually ramped down (7 seconds) to low level to allow eyes time to adjust. Sensor detection range is 360 degrees horizontal x average of 25' - 30'.

DUAL BEAM OPTICS - Utilizes two separate LED arrays to provide more uniform illumination - proprietary to LSI. Results in unprecedented fixture spacing, while providing great uniformity.

EXPECTED LIFE - Minimum 60,000 to 100,000 hours depending upon the ambient temperature of the installation location. See LSI website for specific guidance.

LEDS - 16 or 30 select high-brightness LEDs in Cool White (5400°K) or Neutral White (3800°K) color temperature, 70 CRI (nominal).

REFLECTOR/DISTRIBUTION - 360° or 180° distribution.

EMERGENCY OPTIONS - Integral emergency battery-back-up options are available. BB option operates in 0°C to 60°C ambient temperature and CWBB operates in -20°C to 60°C ambient temperature. When primary AC power failure occurs, both options battery operate 10 LEDs in upper ring aperture for a minimum of 90 minutes and exceed NFPA-Life Safety Code requirements for means of egress lighting.

LOWER HOUSING - One-piece, heavy-walled, extruded aluminum, .322" thick for vandal resistance. Various heights are available in 6" increments starting at 30" (maximum height is 60"). Lower housing attaches to cast aluminum base plate with four stainless steel roll pins.

CROWN ASSEMBLY - Flat or domed, heavy cast aluminum. For added security against vandals, crown attaches to lower housing with four captive, concealed 1/4" x 20 Allen-head screws.

LENS - 2 one piece heavy walled borosilicate lenses are recessed .764" and protected by three cast ribs for vandal resistance. Exposed portion of top lens is only .934" tall with the lower lens being only 1.831" tall.

BASE PLATE - Extra thick, 1/2" cast T6 treated aluminum base is conversion coated and black powder coated for corrosion resistance.

OPTIONAL ROUGHNECK REINFORCEMENT - .375" thick zinc plated, steel base plate with welded U shaped reinforcement. 3/8" diameter 302 stainless steel roll pins with 10,000 lb. shear load.

ANCHOR BOLTS - Anchor bolts are 3/8"x10" long heavy duty galvanized steel. Four (4) are furnished.

ELECTRICAL - Universal voltage power supply (120-277 VAC 50/60HZ). 347-480V also available. 350 mA standard. Surge protector meets IEEE C62.41.2-2002, Scenario 1 Location Category C.

OPERATING TEMPERATURE - -40°C to +50°C (-40°F to +122°F).

FINISH - Each fixture is finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling, and is guaranteed for five years. Standard colors include bronze, black, platinum plus, white, graphite, satin verde green, and metallic silver.

WARRANTY - LSI LED fixtures carry a limited 5-year warranty.

PHOTOMETRICS - Application layouts are available upon request. Contact LSI Applications Group at lighting.apps@lsi-industries.com.

SHIPPING WEIGHT - 50 lbs.

LISTING - Listed to U.S. and Canadian standards. Suitable for wet locations.

LED lighting facts®
A Program of the U.S. DOE

Light Output (Lumens) 1690
Watts 34
Lumens per Watt (Efficacy) 49

Color Accuracy
Color Rendering Index (CRI) 72

Light Color
Correlated Color Temperature (CCT) 5492 (Daylight)

Warm White 2700K Bright White 3000K Daylight 4500K 6500K

Warranty** Yes

All results, except LED Lumen Maintenance, are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

** See www.lightingfacts.com/products for details.

Registration Number: KGGN-3RAHCH (8/28/2012)
Model Number: XHYP3 360 LED 30 350 CW UE
Type: Bollard

LIGHT OUTPUT - XHYP					
Description		# of LEDs	Full Output Lumens	Full Output Watts	Low Output Lumens Watts
Cool White	XHYP3-360	30	1690	34	692 12
	XHYP3-180	16	950	20	401 7
	XHYP3-360-30-BB	10	748	20	— —
Neutral White	XHYP3-360	30	1599	34	— —
	XHYP3-180	16	856	20	— —
	XHYP3-360-30-BB	10	—	—	— —
350mA - Standard					

This product, or selected versions of this product, meet the standards listed below.

Please consult factory for your specific requirements.

IP65



ARRA

Funding Compliant



Suitable for wet locations



LSI GREENLEE® LED SPEC GRADE BOLLARD (XHYP3)

PRODUCT ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **XHYP3 360 LED 30 350 NW UE BRZ FT IMS**

Prefix	Distribution	Light Source	# of LEDs	Drive Current	Color Temp	Input Voltage	Finish	Top	Options
XHYP3 - LED Hyperion	360°	LED	30	350 - 350mA	NW - Neutral White CW - Cool White	UE - Universal Electronic (120-277) 347-480	BRZ - Bronze BLK - Black PLP - Platinum Plus WHT - White GPT - Graphite SVG - Satin Verde Green MSV - Metallic Silver	FT - Flat Top DT - Dome Top	H - XX (Specify Height) ¹ GFR - GFI Duplex Receptacle LAB - Less Anchor Bolts IMS - Integral Motion Sensor ⁶ PCI 120 - 120v Button Type Photocell PCI 208-277 - 208 - 277v Button Type Photocell PCI 347 - 347 Button Type Photocell RN - RoughNeck Heavy Duty Mtg. Plate ⁵ BB - Battery Backup ^{2, 3, 4} CWBB - Cold Weather Battery Backup ^{2, 3, 4} LPC - Lens Protector Casting painted black
	180°		16						

1- Standard height is 42" for FT and 45" for DT. Non-standard heights are available in 6" increments. Minimum height is 30". Maximum height is 60".

2- Not available with 180° Distribution

3- Battery Backup & Cold Weather Battery Backup minimum height is 36"

4- Battery Backup & Cold Weather Battery Backup is only available in 120 - 277v.

5- Rough Neck option must be entered at time of original order. Can't be switched in field.


6- Not CE marked.

ACCESSORIES

ABKIT - Anchor Bolt Kit (BVR) 3/8" x 10" - Galvanized

BASE DETAIL

Note: Base plate dimensions may change without notice.
Do not use for setting anchor bolts. Consult factory for base plate templates.

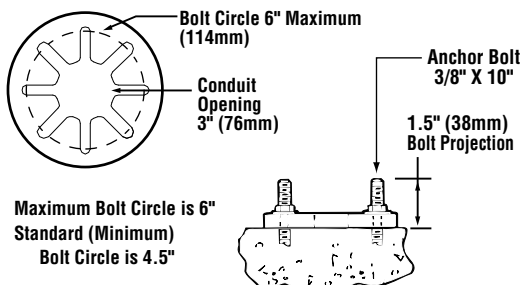

DIMENSIONS

