



# LED LOW PROFILE WRAPAROUND - WNA



## DIMENSIONS



**WNA10 - NARROW BODY**

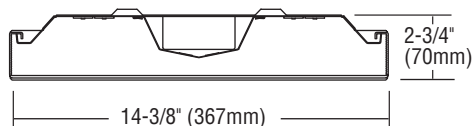

**WNA14 - WIDE BODY**

## PRODUCT HIGHLIGHTS

- Available in nominal 10" and 14" widths
- Economical low profile design
- Wide, even light distribution

**EXPECTED LIFE** - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

**LEDs** - Use of closely-spaced medium-power, high-brightness chips minimizes pixelation and provides uniform lens luminance. Available in Cool White (5300°K), Neutral White (4100°K) and Warm White (3500°K) color temperatures. CRI >= 80 (CW > 70). LM-80 reports available.

**CONSTRUCTION** - Housing constructed of code gauge die formed cold rolled steel. Wire way cover snaps in for easy removal. End plates riveted to housing. Equipped with knockout for nipple insertion.

**LENS** - Frosted, impact-resistant acrylic, hingeable from either side. Exterior surface of lens bottom embossed with prisms, sides embossed with internal prisms for low-brightness illumination.

**ELECTRICAL** - Universal voltage (120-277 Vac) input, 50/60 Hz. Power factor > 0.9, THD < 20%, in-rush current < 15 Amps.

**DRIVER** - High-performance isolated driver features over-voltage, over-current and short-circuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10V dimming available.

**FINISH** - All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

**WARRANTY** - Limited 5-year warranty.

**LISTING** - UL Listed to U.S. and Canadian safety standards. Suitable for damp locations. IBEW Union made in the U.S.A

## LIGHT OUTPUT - LED WNA

		WNA 10			WNA 14		
		Lumens	Watts	LPW	Lumens	Watts	LPW
Neutral White	SS	3520	33	107	-	-	-
	HO	5470	55	99	6520	56	118
	VHO	-	-	-	10860	89	122



## ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **WNA10 LED SS CW UE EM**

Prefix	Light Source	Drive Current	Color Temperature	Voltage	Options
WNA10 - Narrow Body	LED	SS - Super Saver HO - High Output	CW - Cool White NW - Neutral White WW - Warm White	UE - Universal Electronic (120-277V)  347 - 347V	DIM - 0-10V Dimming EM - Emergency Pack
WNA14 - Wide Body		HO - High Output VHO - Very High Output			

## ACCESSORY ORDERING INFORMATION

(Accessories are field installed)

Description	Order Number
Pendant Mount Kit (3/8" IP Stems)	PMK