



# LED XRMU/XRSU Roadway Lighting

**RETROFIT NOW**  
Start Saving Energy  
**TODAY!**

*Innovative optic and control technology make LSI's XRMU and XRSU a perfect roadway lighting solution*

- Available in two sizes and multiple distributions (Type 3, FT and Type 5)
- Adjustable  $\pm 5^\circ$  with integral leveling bubble for fixture leveling
- Super Saver (SS) or High Output (HO) driver currents for outstanding performance – excellent illumination, uniformity and improves trespass control
- **Venabled** - Sophisticated controls such as dimming, bi-level switching and LSI Virticus wireless controls and information systems translate to tremendous energy savings
- One-piece housing ensures protection from rain and contaminants
- Minimum 60,000 – 100,000 hours expected life
- Accepts a range of mast arms from 1-1/4" (1.66" O.D.) to 2" 2.375" (O.D.) for mounting on roadway or utility poles
- Maintenance-free
- Meets luminaire Vibration 3G requirements
- 5 year warranty



**Designed to IES Model Lighting Ordinance Standards & Comply with illumination guidelines set by IESNA RP-8**

**SEEING IS BELIEVING**





## SmartTec™ - The LSI Difference

Designed and built around LSI's own Crossover LED Lighting Technology and SmartTec intelligence platforms, our LED solutions are second to none. The XRMU and XRSU contain intelligent components designed, engineered and manufactured by LSI specifically to work in unison to deliver the most efficient and reliable lighting solution possible.

SmartTec ensures optimum fixture performance, energy efficiency, delivered lumens per watt, longevity and an impressive ROI.

## Ordering Your Roadway Lighting from LSI is as Easy as 1, 2, 3!

### A Complete System -

*Roadway Fixture, Mast Arm & Tenon Pole or Just the Fixture*

1

#### LED Roadway Fixture (XRMU/XRSU)


Lightweight, low profile design gives a clean look when installed. Housings feature a tapered rear design, allowing fixtures to be mounted to a range of mast arms from 1-1/4" (1.66" O.D.) to 2" (2.375" O.D.) pipe using an internal clamping bracket. Tenon reducers are available for larger existing mast arms.



2

#### LSI Mast Arm

- 4', 6' and 8' aluminum tapered elliptical arm lengths
- Heat treated to T6 temper
- Single and D180° mounting configurations
- Mounts to poles with 2" pipe (2.375" O.D.) tenon
- Arms with 32" rise

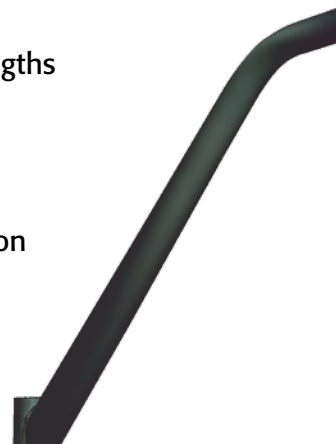

3

#### Tenon Poles - Steel or Aluminum

- Quality polyester-powder coated poles
- Steel poles finished with LSI's patented DuraGrip® finish (5-year limited warranty on finish). DuraGrip Plus finish option available with 7-year limited warranty
- 2" (2-3/8" O.D. X 4-3/4" tall) high-strength pipe tenon



**Order your entire LED XRMU/XRSU Roadway System from LSI to Guaranty a Continuous Color Match on the Fixture, Mast Arm and Pole.**