



LED XRMU Roadway Lighting

RETROFIT NOW
Start Saving Energy
TODAY!

*Innovative optic
and control technology make
LSI's XRMU a perfect roadway lighting solution*

- Available with Type 3, Forward Throw and 5 reflectors and Super Saver (SS) or High Output (HO) driver currents for outstanding performance – excellent illumination, uniformity and improves trespass control

- One-piece housing ensures protection from rain and contaminants

Accepts a range of mast arms from

- 1-1/4" (1.66" O.D.) to 2" 2.375" (O.D.) for mounting on roadway or utility poles

Adjustable +/-5° with integral leveling

- bubble for fixture leveling

- **Venabled** - Sophisticated controls such as dimming, bi-level switching and LSI Virticus wireless controls and information systems translate to tremendous energy savings

- Minimum 60,000 – 100,000 hours expected life

- Maintenance-free

- Meets luminaire Vibration 3G requirements

- 5 year warranty



**Designed to IES Model Lighting Ordinance Standards & Comply with
illumination guidelines set by IESNA RP-8**

SEEING IS BELIEVING





SmartTec™ - The LSI Difference

Designed and built around LSI's own Crossover LED Lighting Technology and SmartTec intelligence platforms, our LED solutions are second to none. The XRMU contains intelligent components designed, engineered and manufactured by LSI specifically to work in unison to deliver the most efficient and reliable lighting solution possible.

SmartTec ensures optimum fixture performance, energy efficiency, delivered lumens per watt, longevity and an impressive ROI.

Ordering Your Roadway Lighting from LSI is as Easy as 1, 2, 3!

A Complete System -

Roadway Fixture, Mast Arm & Tenon Pole or Just the Fixture

1

LED Roadway Fixture (XRMU)


Lightweight, low profile design gives a clean look when installed. Housings feature a tapered rear design, allowing fixtures to be mounted to a range of mast arms from 1-1/4" (1.66" O.D.) to 2" (2.375" O.D.) pipe using an internal clamping bracket. Tenon reducers are available for larger existing mast arms.



2

LSI Mast Arm

- 4', 6' and 8' aluminum tapered elliptical arm lengths
- Heat treated to T6 temper
- Single and D180° mounting configurations
- Mounts to poles with 2" pipe (2.375" O.D.) tenon
- Arms with 32" rise

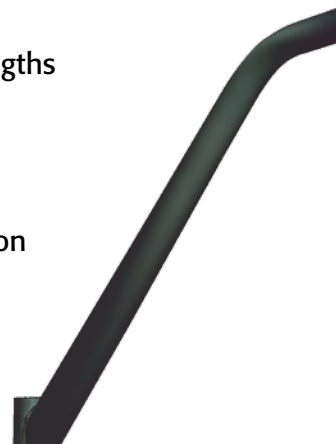

3

Tenon Poles - Steel or Aluminum

- Quality polyester-powder coated poles
- Steel poles finished with LSI's patented DuraGrip® finish (5-year limited warranty on finish). DuraGrip Plus finish option available with 7-year limited warranty
- 2" (2-3/8" O.D. X 4-3/4" tall) high-strength pipe tenon



Order your entire LED XRMU Roadway System from LSI to Guaranty a Continuous Color Match on the Fixture, Mast Arm and Pole.