

LED PRECISION 1X4 WRAP - 88

PRODUCT HIGHLIGHTS

- Accurately controlled light output with excellent brightness control.
- 13" width is useful in retro-fitting 1 x 4 units. The body covers unpainted ceiling when the old unit is replaced.

EXPECTED LIFE - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

LEDs - Use of closely-spaced medium-power, high-brightness chips minimizes pixelation and provides uniform lens luminance. Available in Cool White (5000K), Neutral White (4000K) and Warm White (3500K) color temperatures. CRI ≥ 80 (C_W > 70). LM-80 reports available.

CONSTRUCTION - The housing is die-formed 20 gauge cold-rolled steel. 20 gauge cold-rolled steel reflector with white polyester powder coated finish optionally available.

LENS - Extruded frosted prismatic acrylic lens. Hinges from either side without tools.

ELECTRICAL - Universal voltage (120-277 Vac) input, 50/60 Hz. Power factor > 0.9, THD < 20%, in-rush current < 15 Amps.

DRIVER - High-performance isolated driver features over-voltage, over-current and short-circuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10V dimming standard.


FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of housing reflecting surfaces is with white, high-reflectance (minimum 92%) polyester powder.

WARRANTY - Limited 5-year warranty

LISTING - UL Listed to U.S. and Canadian safety standards. Suitable for damp locations. IBEW Union made in the U.S.A



DIMENSIONS

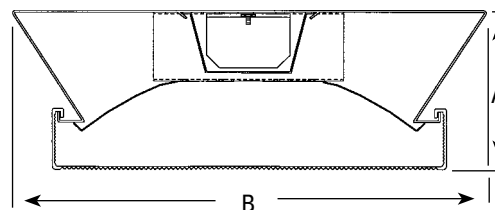

	Fixture HEIGHT (A)	WIDTH (B)	LENGTH
88-4'	4-7/16" (112mm)	13" (330mm)	48" (1168mm)
88-8'	4-7/16" (112mm)	13" (330mm)	96" (2438mm)
88-2'	4-7/16" (112mm)	13" (330mm)	24" (610mm)

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



LIGHT OUTPUT - LED 88							
Neutral White		882			884		
		Lumens	Watts	LPW	Lumens	Watts	LPW
	SS	3050	29	105	3190	29	110
	HO	-	-	-	5080	43	118

LED Chips are frequently updated therefore values may increase.

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **884 LED SS CW UE EM**

Prefix	Light Source	Drive Current	Color Temperature	Voltage	Options
882 - 2-foot	LED	SS - Super Saver HO - High Output	CW - Cool White (5000K) NW - Neutral White (4000K) WW - Warm White (3500K)	UE - Universal Electronic (120-277V) 347 - 347V	EM - Emergency Pack BOR EOR MOR SD50 - Step Dimming to 50%
884 - 4-foot					
888 - 8-foot					

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Pendant Mount Kit (3/8" IP Stems)	PMK



Project Name _____ Fixture Type _____
Catalog # _____

© 2015
LSI INDUSTRIES INC.